Model:

PRS Custom 24


PRS Custom 24 "Floyd"

PRS S2 Custom 24


Pickup Cavity Bridge **Ground Wires** Ground Wire Volume Solder shielding from jack wire to volume pot casing .033 uF 'Hot' from Jack Cable to Volume Pot middle lug Solder pickup harness orange wires to blade switch grounding lug To Output Jack

Note: Pickup shape is just for reference. All pickups using this diagram shall be oriented in this manner.

Bass (Neck) Pickup




Treble (Bridge) Pickup



Bridge location

5-way Pickup Selector Switch:

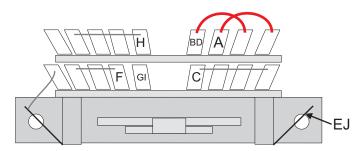

Bass Pickup Wires

Treble Pickup Wires A - Green B - Red C - White

D - Black E - Orange

F - Green G - Red H - White I - Black J - Orange

Operating Instructions

5-way blade pickup switch:

Position 1 (down) - Treble Pickup

Position 2 - Treble Humbucking Pickup and Bass Single Coil

Position 3 - Treble and Bass Humbucking Pickups

Position 4 - Treble Single Coil and Bass Single Coil

Position 5 (up) - Bass Pickup

