Model:


PRS McCarty 594 (pre-2024)


PRS McCarty 594 Singlecut (pre-2024)

PRS McCarty 594 Hollowbody II (pre-2024)


Bass Pickup lead Solder ground from Toggle Switch wire from bridge (Ground to to volume pot casing Pickup Cavity Pickup Shielding) Ground Wires Bass Pickup lead from pickup **Bass** (Ground to pot casing) Treble Pickup lead from Toggle Switch .022 uF (Ground to Pickup Shielding) To Output Jack Treble Pickup lead from pickup .022 uF (Ground to pot casing) Solder shielding from jack wire > to pot casing

Note: Pickup shape is just for reference.
All pickups using this diagram
shall be oriented in this manner.

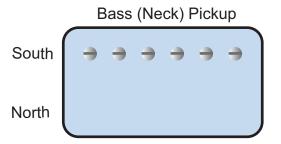

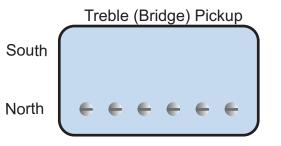

Bridge location

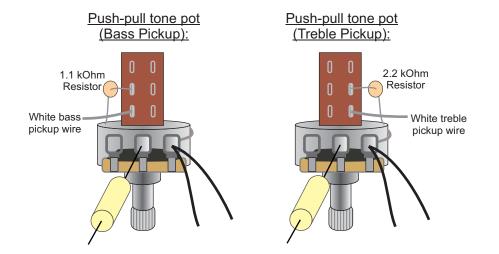

## **Operating Instructions**

3-way toggle pickup switch:
Position 1 (down) - Treble Pickup
Position 2 - Treble and Bass Pickups

Position 3 (up) - Bass Pickup

Push-Pull Tone Pot:

Down - Humbucker Mode

Up - Single Coil Mode