Model:


PRS McCarty 594 (2025)


PRS McCarty 594 Singlecut (2025)

PRS McCarty 594 Hollowbody II (2025)


Bass Pickup lead Solder ground from Toggle Switch wire from bridge (Ground to to volume pot casing Pickup Cavity Pickup Shielding) **Ground Wires** Bass Pickup lead from pickup Bass (Ground to pot casing) Tone Treble Pickup lead from Toggle Switch .033 uF (Ground to Pickup -Shielding) To Output Jack Treble Pickup lead from pickup .033 uF (Ground to pot casing) Jush-pull Solder shielding from jack wire to pot casing

Note: Pickup shape is just for reference.
All pickups using this diagram
shall be oriented in this manner.

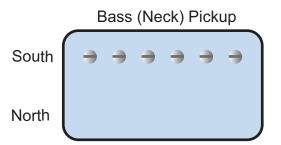

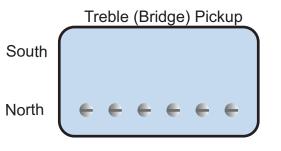

Bridge location

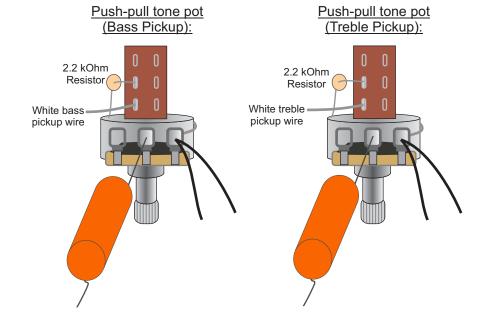

Operating Instructions

3-way toggle pickup switch:

Position 1 (down) - Treble Pickup Position 2 - Treble and Bass Pickups Position 3 (up) - Bass Pickup

Push-Pull Tone Pot:

Down - Humbucker Mode

Up - Single Coil Mode